


Very HRC Fuses 5x20

125V to 250V - SA/SB Medium Time Lag

FROM 0,04 TO 16A

Dimensions

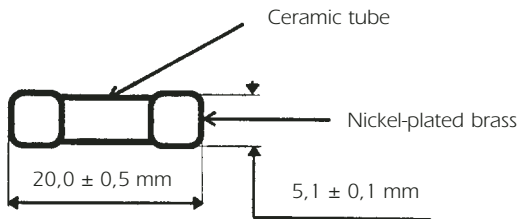

Fuses with filler.
Max weight: 1.2 g

Basic Characteristics

Size	Rated Voltage	Rated Current	Breaking Capacity	[I ² t] Pre-arcing	[I ² t] Total clearing at U _n	Max voltage drop at I _n	Designation			Reference Number	Catalog Number
mm	VAC	A		A ² s		V					
5 x 20	250	0,040	250 VAC	0,00013	0,0004	1,5	250V SB	0,040 A	5x20	C080479	MI5SB25V0,04
		0,050	4 kA	0,00029	0,00082	1,2	250V SB	0,050 A	5x20	R080469	MI5SB25V0,05
		0,063	cos φ ≥ 0,7	0,00057	0,0016	1	250V SB	0,063 A	5x20	F080482	MI5SB25V0,063
		0,080		0,00131	0,0037	0,8	250V SB	0,080 A	5x20	B080478	MI5SB25V0,08
		0,100		0,00077	0,0021	1,4	250V SA	0,100 A	5x20	M084122	MI5SA25V0,1
		0,125		0,002	0,006	1,1	250V SA	0,125 A	5x20	L084121	MI5SA25V0,125
		0,160		0,0046	0,013	0,9	250V SA	0,160 A	5x20	P084101	MI5SA25V0,16
		0,200		0,009	0,025	0,8	250V SA	0,200 A	5x20	G084117	MI5SA25V0,2
		0,250		0,016	0,045	0,75	250V SA	0,250 A	5x20	O084102	MI5SA25V0,25
		0,315		0,030	0,085	0,7	250V SA	0,315 A	5x20	H084118	MI5SA25V0,315
		0,400		0,050	0,15	0,68	250V SA	0,400 A	5x20	J084119	MI5SA25V0,4
		0,500		0,12	0,35	0,55	250V SA	0,500 A	5x20	R084103	MI5SA25V0,5
		0,630	250 VAC	0,11	0,25	0,26	250V SA	0,630 A	5x20	F084116	MI5SA25V0,63
		0,800	10 kA	0,17	0,38	0,26	250V SA	0,800 A	5x20	K084120	MI5SA25V0,8
		1,000	cos φ ≥ 0,7	0,26	0,65	0,26	250V SA	1,000 A	5x20	S084104	MI5SA25V1
		1,250		0,55	1,2	0,2	250V SA	1,250 A	5x20	T087164	MI5SA25V1,25
		1,600		1,44	3,2	0,16	250V SA	1,600 A	5x20	D087173	MI5SA25V1,6
		2,000		2,46	5,5	0,15	250V SA	2,000 A	5x20	M087020	MI5SA25V2
		2,500		4,6	10	0,14	250V SA	2,500 A	5x20	N087021	MI5SA25V2,5
		3,150		11	25	0,11	250V SA	3,150 A	5x20	P087022	MI5SA25V3,15
		4,000		23	50	0,1	250V SA	4,000 A	5x20	Q087023	MI5SA25V4
		5,000		41	90	0,1	250V SA	5,000 A	5x20	R087024	MI5SA25V5
		6,300		15,7	50	0,11	250V SA	6,300 A	5x20	S087025	MI5SA25V6,3
8		27,5	85	0,11	250V SA	8,000 A	5x20	T087026	MI5SA25V8		
10		53	160	0,1	250V SA	10,00 A	5x20	V087027	MI5SA25V10		
12,5*		63	200	0,095	250V SA	12,50 A	5x20	W087028	MI5SA25V12,5		
125	16*	10 kA 125 VAC	cos φ ≥ 0,7	163	350	0,11	125V SA	16,00 A	5x20	W086338	MI5SA12,5V16

* For these ratings, heating within fuse holder must be checked.

Very HRC Fuses

5x20




125V to 250V - SA/SB Medium Time Lag

Time-current characteristics

250 V SB 5 x 20



250 V SA 5 x 20

250 V SA 5 x 20

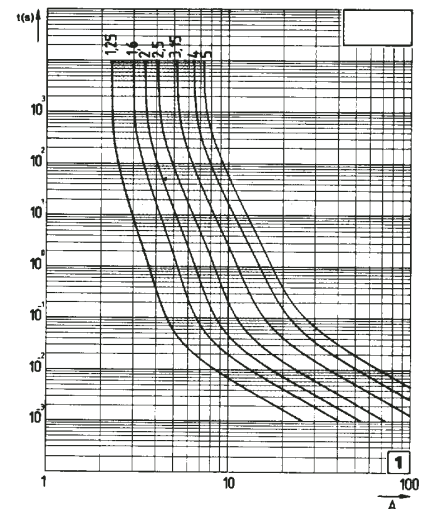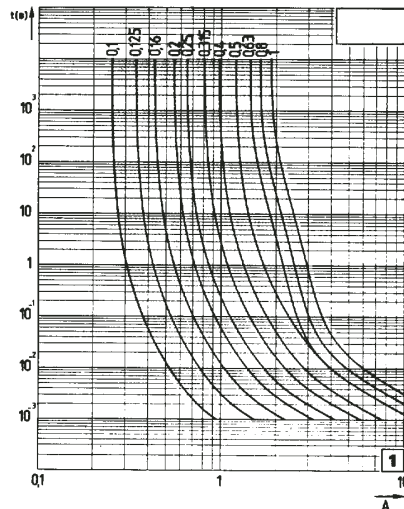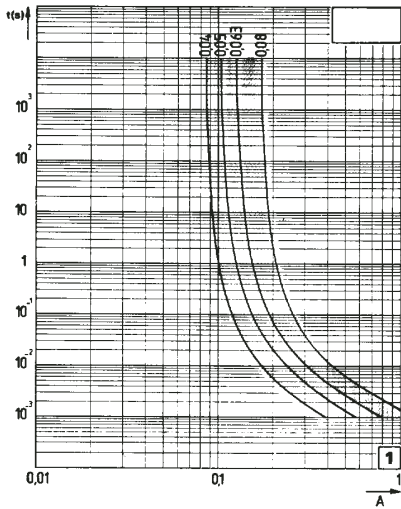

250 V SA 5 x 20

125 V SA 16 A

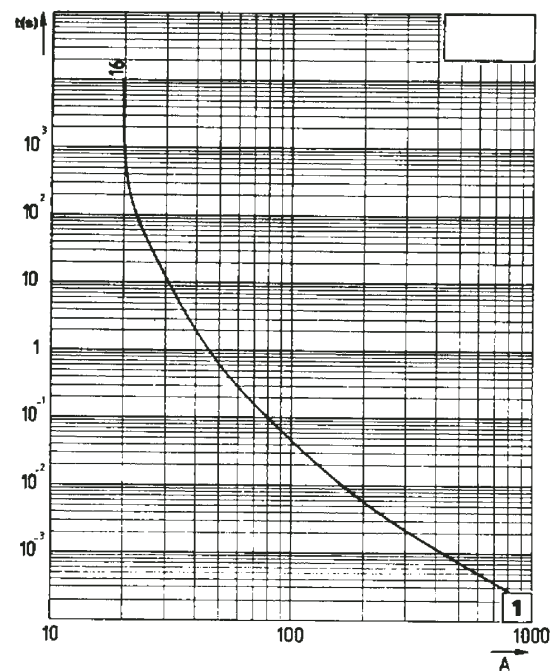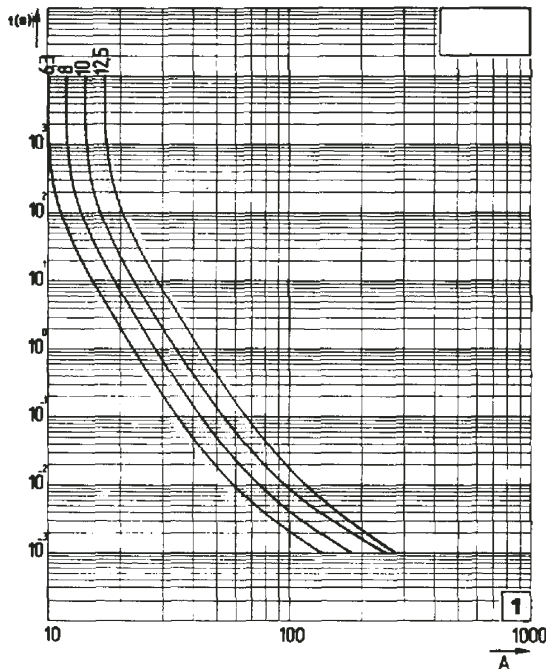

I tolerance $\pm 12\%$. Actual pre-arcing time (s). R.M.S. Value of pre-arcing current (A).

Packaging: in blister of 50 pieces.

Ask us about boxes of 1000 pieces.